

## SPK - Spraynkler

Sprinkler nozzle designed for tank cleaning

### product data

- pressure range 1-4 bar (14,5 - 58 psi)
- fluid connection Rp 3/4"
- cleaning range up to Ø1200mm
- Hygienic Design (Ra < 0,4µm)
- nozzle diameters Ø 0,13 / 0,16 in (3,2 / 4 mm, others on request)
- temperature insensitiv
- freely selectable installation angle
- high durability and maintenance-free
- steam sterilizable and self-draining
- stainless steel 1.4404
- special versions on request



the slightly different spray ball




- ➔ no moving parts
- ➔ insensitive to clogging by product residues
- ➔ hygienic risks are minimized


## SPK - Spraynkler

Sprinkler nozzle designed for tank cleaning


spray pattern

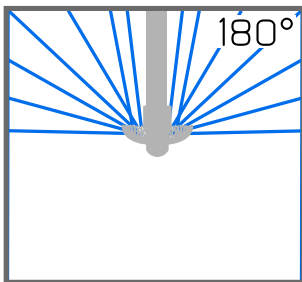

SPK-346-UP

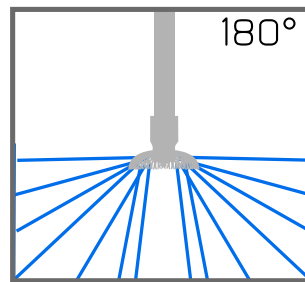


SPK-346-DOWN

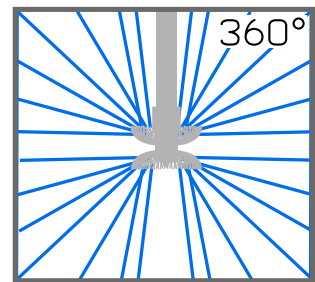

SPK-346-360

spray pattern: 180° up, 180° down, 360°  
baffle plate: "coral" or "oak-slitted"

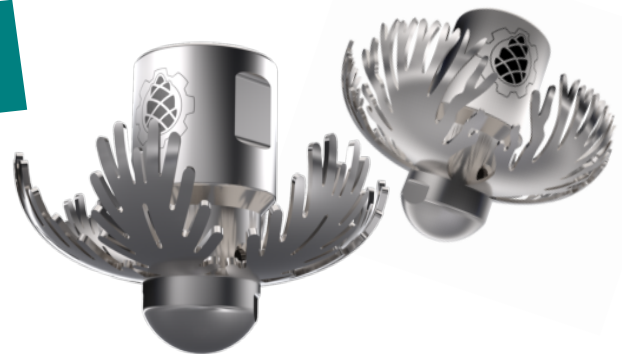

Hohe Tanne GmbH  
Hohe Tanne 7  
DE-98701 Großbreitenbach  
Phone \*49(0)36781/ 2410-0  
Fax \*49(0)36781/ 2410-10  
info@hohe-tanne.tech