SWR-004...060

Surge cleaner
hydrodynamic bearing

product data

- pressure range 14,5 - 72,5 psi / 1-5 bar
- spray pattern 360°/270°/180°
- operating temperature 41-140°F / 5 - 60 °C
- ambient temperature up to 212°F/ 100 °C
- freely selectable installation angle
- high durability and maintenance-free
- FDA-compliant

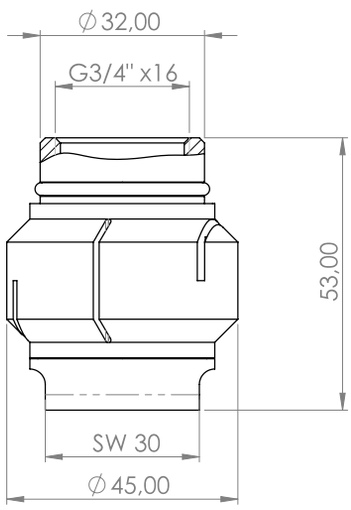

004

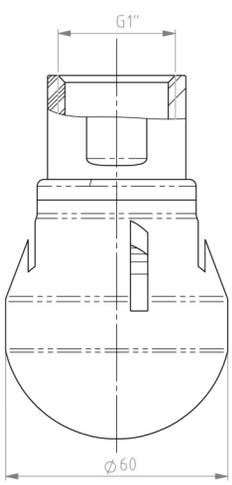

060

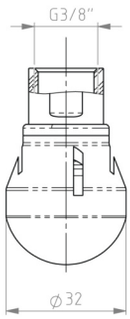

032



018

additionally from size SWR-018:

- pressure range 14,5 - 97 psi / 1-6 bar (SWR-060 up to 130,5psi / 9 bar)
- Hygienic Design (Ra < 0,4µm)
- operating temperature 41-194°F / 5 - 90 °C, 482°F / 250°C on request
- steam sterilizable
- ATEX on request
- USP Class VI on request

HOHEranne®

SWR-004...060

Surge cleaner
hydrodynamic bearing

spray pattern

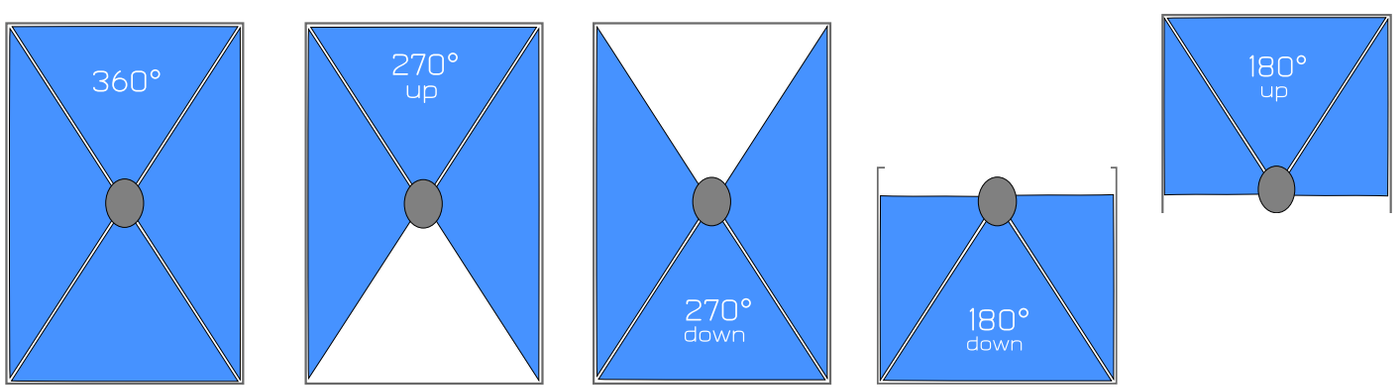

spray pattern: 360° / 270°/ 180°

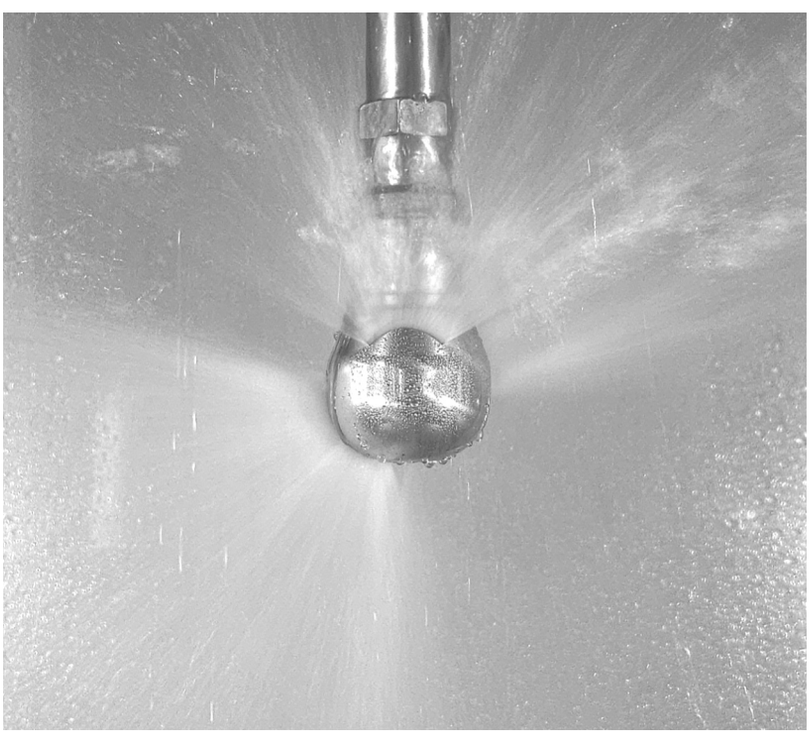

Hohe Tanne GmbH
Hohe Tanne 7
DE-98701 Großbreitenbach
Phone *49(0)36781/ 2410-0
Fax *49(0)36781/ 2410-10
info@hohe-tanne.tech

HOHEranne®